

novus:HM GmbH • Schlegelweg 10 • 95189 Köditz

TERRA-GRID E® 35

Interlocking Ground Reinforcement Grid

Technical Specifications


<u>Material:</u>	PE – Recycling Material
Colour:	Black
Closed Surface Area:	50 % raised points for grip
Load bearing capability:	up to 160 tonnes/m ² * *Depending on ground conditions and preparation
Dimensions (individual grid)	302 x 302 x 37 mm** ** not including connecting lugs
Mat size:	122 x 92 cm + / - 3 % 4 x 3 Terra-Grid®
Weight per made-up section:	6,2 kg
No. of sections per pallet:	73
Total surface area per pallet:	80,40 m ²
Weight per pallet:	approx. 480 kg
Height per pallet:	approx. 230 cm

UV und frost resistant

Resistant to oil, solvents,

Salt water, most Acids

Does not rot

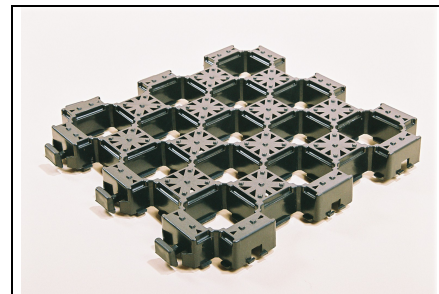

TERRA-GRID E® is certified RAL-GZ 806 Standard



novus:HM GmbH
OT Joditz
Schlegelweg 10
95189 Köditz

+49(0)92 95 - 91 50 740
+49(0)92 95 - 91 50 739

Geschäftsführer: Jürgen Heckelsmüller
Handelsregister B Hof HBR 6393

Steuer-Nr.: DE 347 188 524 | USt.-ID Nr.: DE 225 803 259
EORI-Nr.: DE 450 659 663 757 394

Raiffeisenbank Schwaben Mitte e.G.
IBAN: DE71 7206 9736 0007 1298 90 | BIC: GENODEF1BLT