

Paddock with **TERRA- GRID E 35**

novus:HM

www.novus-hm.com



Structure of layers with geotextile normally driveable




Advantages:

- Non- residue renaturation
- Quick and easy installation on one's own initiative
- No civil engineering
- No need for qualified staff
- Assured de- watering without drainage

Installation recommendation

novus:HM

www.novus-hm.com

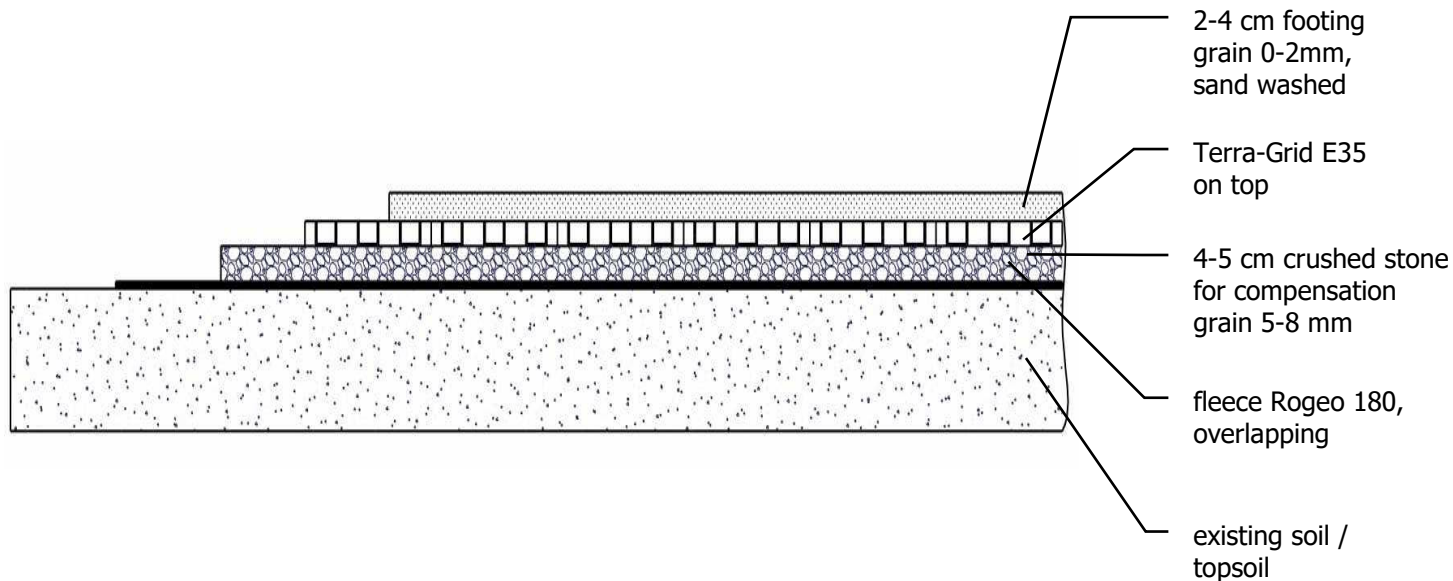

This assembly is particularly suitable for horse runs and riding arenas which are driven only with light equipment.

Calculation/ Demand



www.novus-hm.com

Calculation of need for bulk solids/ per sqm:

Crushed stone/grit = 0,05 cbm or 0,07 t per sqm

Sand/filling material = 0,07 cbm or 0,1 t per sqm

Example calculation for 160 sqm:

Crushed stone/ grit = 160 sqm x 0,07 t = 11,20 t


Sand/ filling material = 160 sqm x 0,1 t = 16,00 t

The installation recommendations and calculations listed above are examples. Local conditions may be significantly different.

Installation

novus:HM

www.novus-hm.com

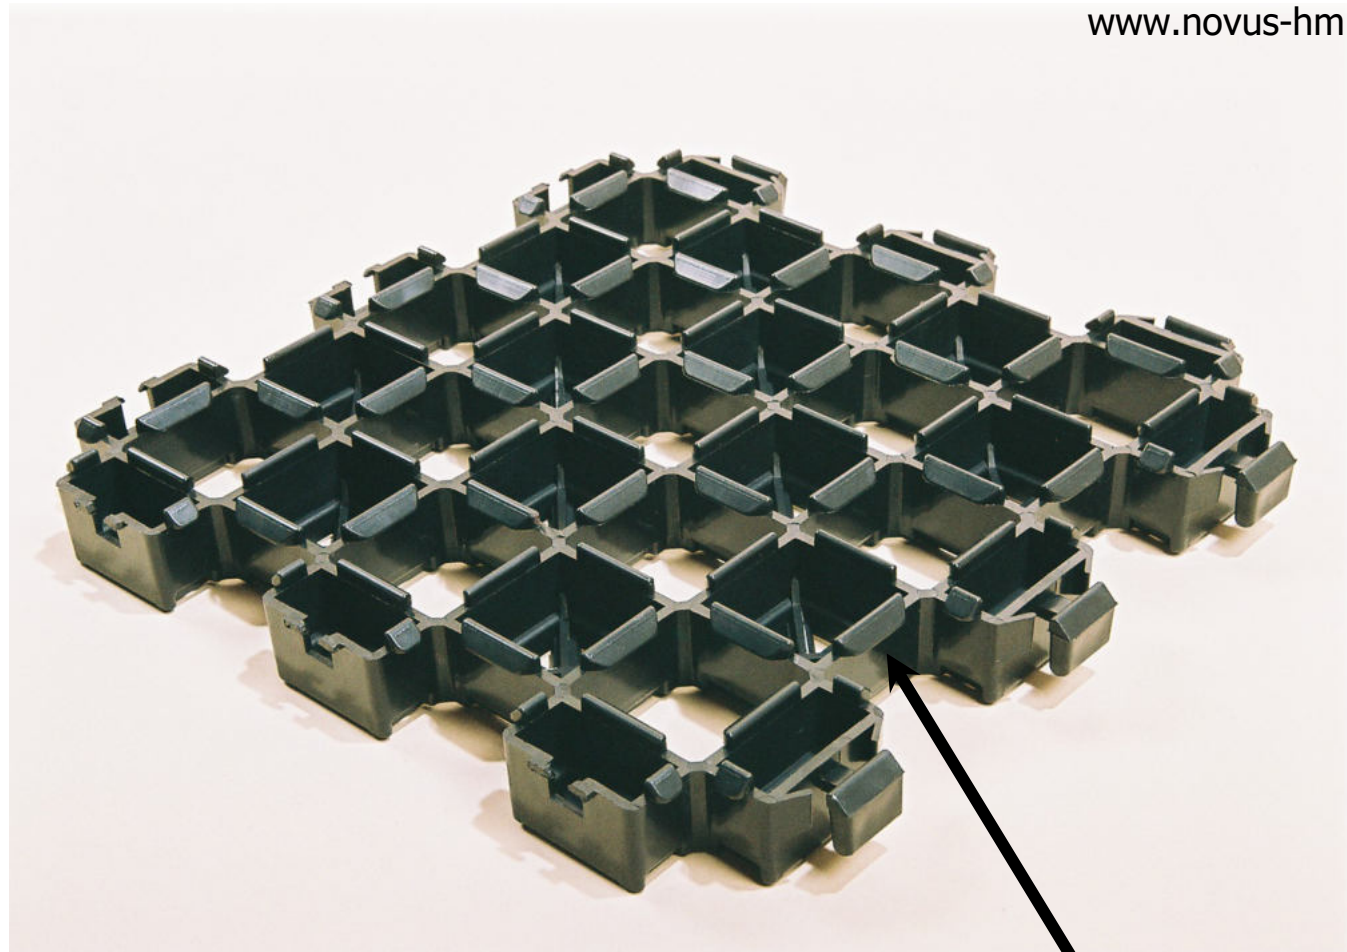

TERRA- GRID E 35 on top, what means its closed side on bottom.

Impressions



Here is our gallery of previous, succesful projects.



Tel. +49 (0) 9295 – 9150 740

© Copyright novus:HM